

# LIGHTWEIGHT, HIGH STRENGTH FIBERGLASS BAFFLE PANELS FOR UNDERWATER FLOW CONTROL APPLICATIONS.





PROPERTY	TEST	VALUE
Tensile Strength	ASTM D-638	52,000 psi
Flexural Strength	ASTM D-790	66,000 psi
Flexural Modulus	ASTM D-790	2.4 x 10 <sup>6</sup> psi
Barcol Hardness	ASTM D-2583	50 ft-lbs/in
Notched Izod	ASTM D-256	25 ft-lbs/in
Water Absorption	ASTM D-570	0.20%

## APPLICATIONS

- Aeration Chambers
- Contact Chambers
- Retention Basins
- Water & Wastewater Systems

## CONFIGURATIONS

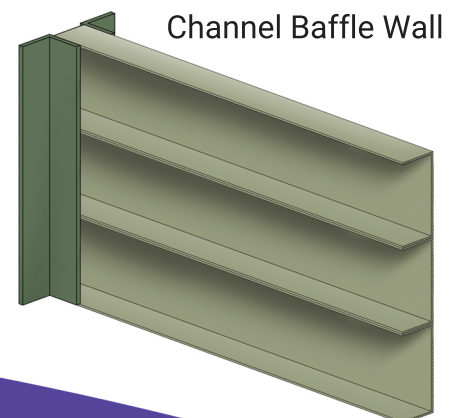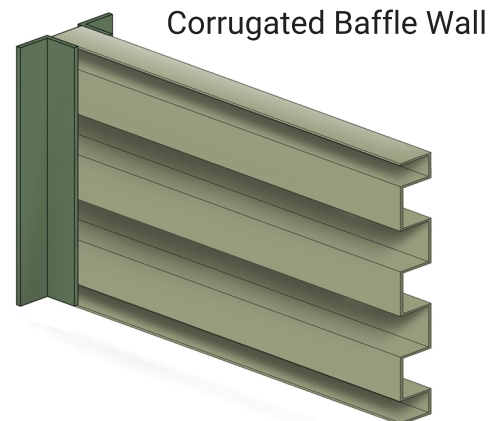

For more information visit our website [www.nefco.us](http://www.nefco.us)



NEFCO Systems  
8895 N Military Trail, Suite 100C  
Palm Beach Gardens, FL 33410  
(561) 775-9303



# FRP BAFFLE WALLS



FRP BAFFLE WALLS

## BENEFITS

- Control water flow
- Longer lifespan
- Low conductivity

## FEATURES

- Municipal & Industrial applications
- UV and corrosion resistant
- ASTM E-84, Vinyl Ester, or NSF 61 available